


## VELOCITY TOLL BARRIER

### AUTOMATIC HIGH SPEED BARRIER FOR TOLL GATE APPLICATIONS

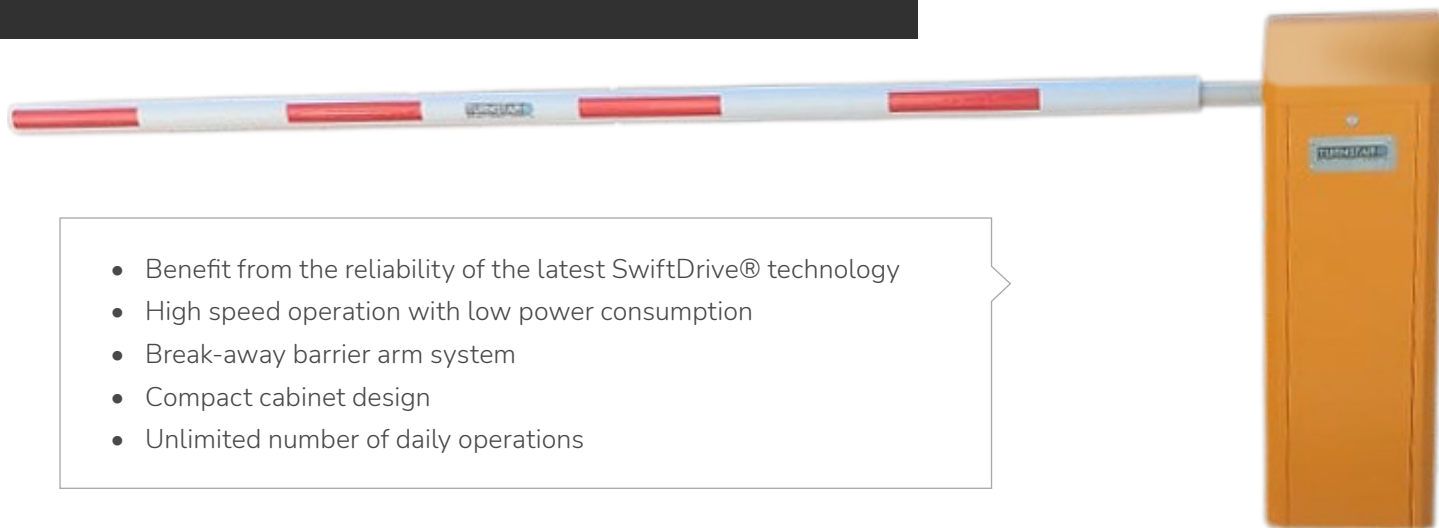

- Benefit from the reliability of the latest SwiftDrive® technology
- High speed operation with low power consumption
- Break-away barrier arm system
- Compact cabinet design
- Unlimited number of daily operations

## KEY FEATURES

- Opening/ Closing time 0.3s to 1.2s (adjustable)
- AC Servo control - exceptional speed, control, reliability and safety
- No spring counterbalance
- Barrier arm opens automatically on power failure
- 100% duty cycle
- Life span  $\geq 10$  million operations
- Available with carbon fibre and aluminium barrier arm options
- Barrier arm fitted with monitored breakaway mechanism
- Left hand and right hand mounting options

## TECHNICAL SPECIFICATIONS

OPERATING TEMP	-25°C - +55°C
INPUT VOLTAGE	240V AC $\pm 10\%$ at 50Hz
CABINET	Powder coated mild steel - Orange
BARRIER ARM	Carbon fibre with polystyrene and PVC cover / powder coated round aluminium tube
SPEED	<b>CARBON FIBRE</b> 1.5m - 0.3s   1.8m - 0.4s   2m - 0.45s   2.3m - 0.5s   2.5m - 0.5s   3m - 0.6s <b>ALUMINIUM</b> 3m - 0.75s   3.5m - 0.9s

JOHANNESBURG  
HEAD OFFICE AND FACTORY

+27 (0)11 786 1633

WESTERN CAPE  
BRANCH

+27 (0)21 981 3043  
+27 (0)82 417 7408

KWAZULU NATAL  
BRANCH

+27 (0)32 947 0391  
+27 (0)76 589 3410

BOLTON, UNITED KINGDOM  
BRANCH

+44 (0)161 706 1760  
+44 (0)7938 684 484

